



Aristocraft Steam

Aristocraft steam tenders – the Long (USRA), Slope back & Vanderbilt – come with a circuit board installed that facilitates connection of the BigSound™ 2K2 board. To ease this installation further we ship all Aristocraft kits with the appropriate connectors to mate with this board.


Power for the sound board:

Plug the included connector into the 2 conductor molex connector labeled “sound pwr”. The bare red and green leads from the Phoenix plug will be inserted into terminals 1 & 2 on the Phoenix board.

DCC NOTE: THE POWER SOCKET IS ON THE MOTOR SIDE OF THE OUTPUT, THEREFORE YOU WILL NEED TO CONNECT THE POWER DIRECTLY TO THE TRACK PICK UPS FOR THE SOUND BOARD TO READ THE DCC INFORMATION.

The Aristocraft speaker:

Plug the included connector into the 3 conductor molex connector labeled “speaker”. The two black leads then will be attached to terminals 7 & 8 on the 2K2; plug the PB9 connector into the PB9 speaker socket.

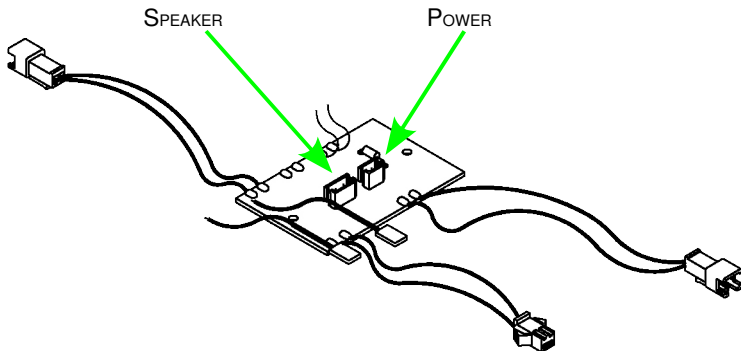

Aristocraft steam tender circuit board